

AugerFlex

Complete Range of Feed Transport Systems




Black silo boots are available in straight drop or 30° model. Made with ultra high impact polypropilene for greater flexibility and durability. Plastic formulation contains special chemical ultraviolet



light inhibitors and impact modifiers to enhance durability and resistance. PVC tubings are extruded to exacting standards with highest thicker possible. Boot unloaders are available



in single or double outlet models, as well as twin through to be used in tandem where 2 tanks are used in line. All unloaders are available in galvanised or stainless steel finishing.

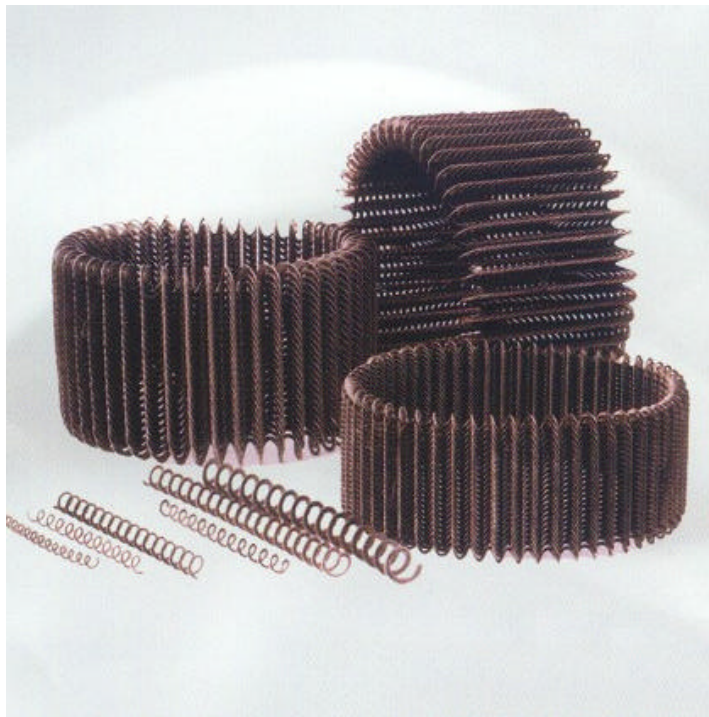

Augers are coiled in our own facility, using high tensile steel flat wire and rolled at desired length without bending. Only one auger piece in each transport circuit.



AugerFlex models are driven by 0,5 to 1,5 HP totally enclosed gear motors. For applications requiring distances longer than standard lengths, extension hoppers are available to extend the lines.



Drop Outlets made in special polyethylene, are available in standard version, or new "clean-out" version which provides total discharge of feed at any drop point.



Avitech Systems

Partida Miralbó 116 • 25660 Alcoletge (Lleida)-SPAIN
Tel: +34-973-196029 • Fax: +34-973-196584
E-Mail: avitechsystems@eresmas.com

The Best Way for Livestock Feed Delivery



AugerFlex Technical Specifications

PIPE DIAMETER DIAMÈTRE TUYAU ROHRDU RCHM mm	AUGER DIAMETER DIAMÈTRE SPIRALE SPIRALD URCHM mm	AUGER PITCH PASS SPIRALE SPIRALSTIEGUNG mm	MOTOR POWER PUISSANCE MOTEUR ANTRIEBSLEISTUNG kw	REVOLUTIONS/1' TOURS/1' UMDREHUNGEN / 1'	PAYLOAD CAPACITÉ STUNDENLEISTUNG kg/h	MAX. LENGTH MAX. LONGUEUR MAX. LÄNGE m	BEND RADIUS COURBE RAYON RADIUS BOGENRADIUS mm	No. BENDS 45° MAX. No. MAX.COURBES 45° MAX. BÖGENANZAHL
50	38,3	38	0,37	285	380	120	1500	3
63	48,3	40	0,55	285	540	100	1500	3
75	53,3	37	0,55	285	1100	100	1500	3
75	60	40	0,75	285	1200	90	1500	2
90	68	50	0,75	285	2400	70	1500	2
125	100	70	1,1	285	4400	40	1500	2