

Maxiflow

High Flow Broiler Nipple Drinker System



Europ Patent S-LL-03-B-6254638



Avitech Systems



Partida Miralbó 116 • 25660 Alcoletge (Lleida)-SPAIN
Tel: +34-973-196029 • Fax: +34-973-196584
E-Mail: avitechsystems@eresmas.com

Maxiflow, High Flow Rate from first day !!




High Flow 360° Nipples

We use standard MK-120 nipple. This is totally 360° action, thanks to special design in delrin body, this nipple gives the same flow rate, even if chicks push the trigger pin sidewise or upwards. For those who prefer totally stainless steel nipple, MK-500 is also available. Both nipples have big flow rate, to use in hot climates, 175 ml/minute with 60 mbar pressure in regulator.

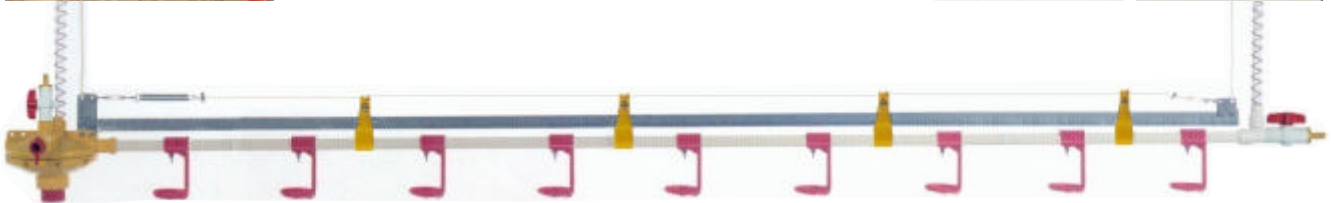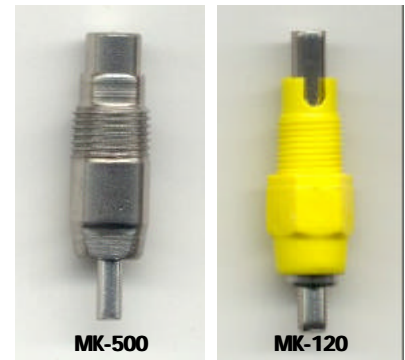

One Arm Drip Cup

Our drip cup, is with one arm type, to help easy access to nipple for baby chicks and older birds. The design of cup is auto-clean, without angles. 7 cm diameter, fixed clamp with snap-on catch

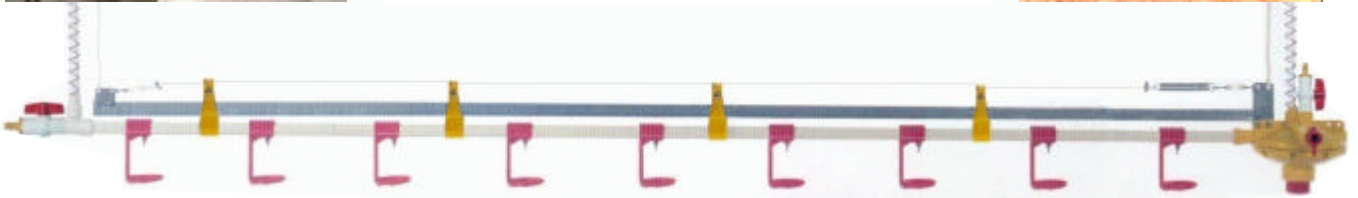

Number of Nipples for Type Bird (depending on climate)

Broilers up to 2 kg	16-18 broilers/nipple
Heavy broilers up to 3 kg	12-14 broilers/nipple
Breeders rearing	10-15 breeders/nipple
Breeders & Cockerels	10-12 breeders/nipple
Free-range layers	10-12 layers/nipple
Ducks (fattening)	8-10 ducks/nipple
Rearing Turkeys	30-40 turkeys/nipple

